


Distance mounting system

ResiTHERM®

16 & 12


Advantages

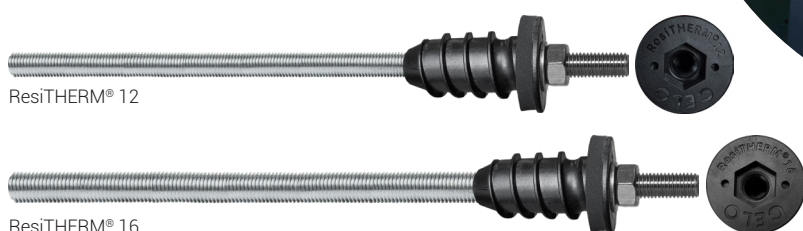

- The perfect solution for mounting heavy loads on insulated façades without thermal bridges
- Suitable for concrete, aerated concrete and masonry made of perforated and solid bricks
- Wide range of applications, such as awnings, canopies, french. balconies, satellite dishes, air conditioners, etc.
- High application flexibility: One set for all insulation types and thicknesses from 60-300 mm in concrete and 60-250 mm in perforated bricks (ResiTHERM® 16), from 60-220 mm in concrete and 60-160 mm in perforated bricks (ResiTHERM® 12)
- Time and cost savings due to simple and quick installation
- Reliable, durable, ETA-tested fixing
- Thermal separation module eliminates heat bridges efficiently and protects against mould and heat loss
- Pre-assembled, weather resistant EPDM sealing ensures safe sealing against driving rain up to wind force 11 (violent storm) and up to 3 mm displacement, watertightness based on DIN EN 1027
- No risk of corrosion due to high-quality materials such as stainless steel A4 and glass-fibre reinforced nylon

Suitable building materials

Very suitable

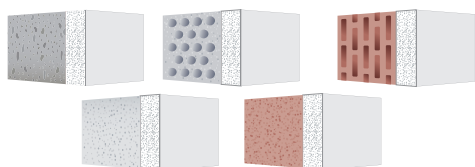


- | | | | |
|-------------------------------------|--|--|--|
| • Concrete | | • Hollow brick | |
| • Solid brick | | • Hollow sand-lime brick | |
| • Solid sand-lime brick | | • Lightweight hollow concrete blocks | |
| • Lightweight solid concrete blocks | | • Natural stone (risk of discolouration) | |
| • Aerated concrete | | | |




Approvals and certificates



Mounting

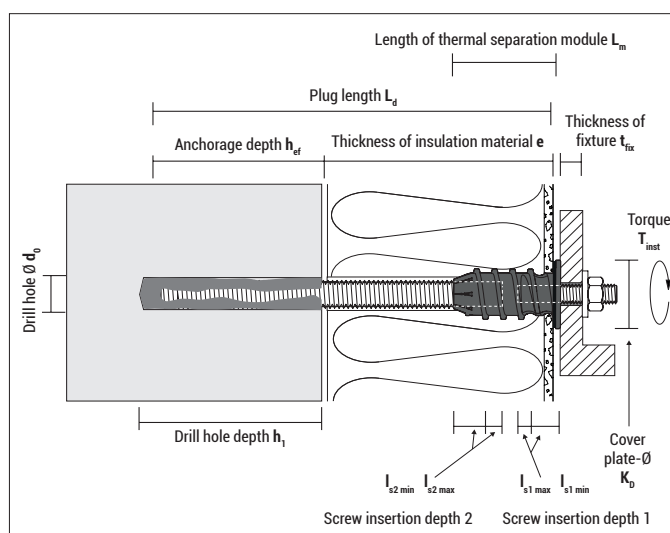


Mounting in concrete

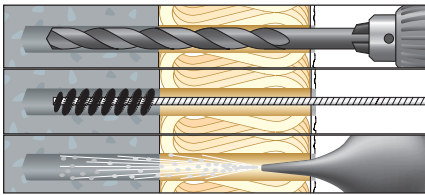


1. Drill a hole: Drill hole depth + insulation thickness


2. Clean the drill hole properly according to ETA:
4x blow - 4x brush - 4x blow

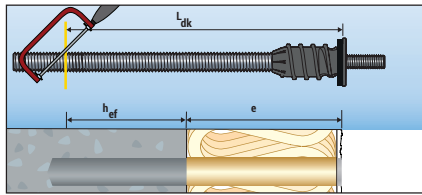

3. Cut the ResiTHERM® 16 or 12 to length:
After determining the correct length, cut the threaded rod to length with a metal saw or similar.

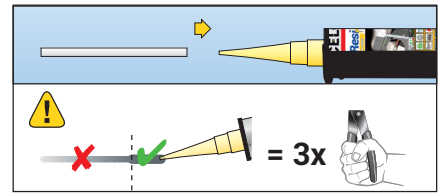


4. Attach the mixing nozzle extension MDV to the mixing nozzle MD.
Squeeze out the injection mortar until the mortar has a uniform grey mixing colour - discard the pre-run of the first at least 3 strokes.

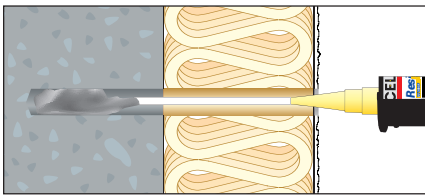


5. Fill at least 2/3 of the drill hole with composite mortar (start from the beginning). For number of strokes see mounting instructions at www.celofixings.com.

Important: Follow the installation instructions and processing time of the ResiFIX injection mortar used in accordance with the approval/assessment.

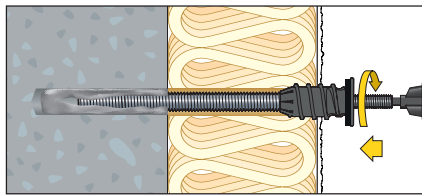

6. Screw in the ResiTHERM® 16 or 12 with the hexagon bit (included) and a cordless screwdriver until the seal is pressed against the plaster.


Note: The thermal separation module drills itself through the insulation (additional sealing is not necessary, unless the plaster is very rough)

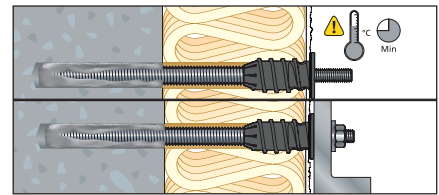

7. Observe curing time of the injection system, see cartridge label of the ResiFIX injection mortar.

8. Afterwards, the attachment can be mounted, max. torque $T_{inst} = 25 \text{ Nm}$ (ResiTHERM® 16) or 19 Nm (ResiTHERM® 12)


Mounting in masonry (hollow brick)

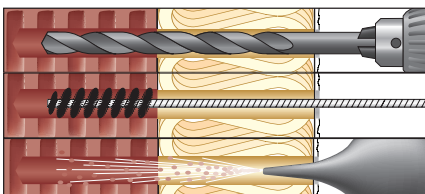


1. Drill a hole: Drill hole diameter = 20 mm.
Drill hole depth $\geq 140 \text{ mm}$ + insulation thickness (incl. plaster). Observe the drilling procedure of the approval/ assessment of ResiFIX injection mortar.

Perforated bricks and aerated concrete: Rotary drilling - without impact

2. Clean the drill hole properly according to ETA:
2x blow - 2x brush - 2x blow

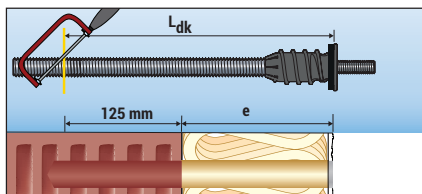


3. Cut the ResiTHERM® 16 or 12 to length:
Correct length L_{dk} : Anchorage depth in plastic sleeve (125 mm) + insulation thickness e (incl. plaster)
After determining the correct length, cut the threaded rod to length with a metal saw or similar.

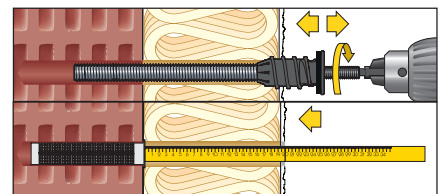


4. Enlarge the opening in the plaster for the collar of the plastic sleeve to 26 mm. To do this, briefly screw the thermal separation module in and out through the plaster for only approx. 2 thread turns or ream the plaster with a drill or drill with a bigger 26 mm drill.

5. Push the plastic sleeve into the drill hole with the help of a folding ruler or similar.

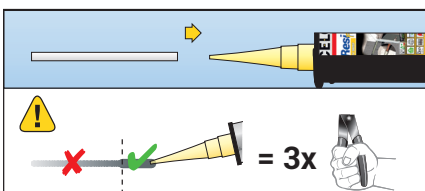

6. Attach the mixing nozzle extension MDV to the mixing nozzle MD.
Squeeze out the injection mortar until the mortar has a uniform grey mixing colour - discard the pre-run of the first at least 3 strokes.

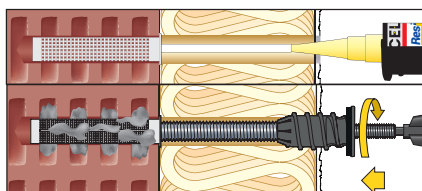


7. Fill the plastic sleeve completely with composite mortar (start from the beginning). For number of strokes see mounting instructions at www.celofixings.com

Important: Follow the installation instructions and processing time of the ResiFIX injection mortar used in accordance with the approval/assessment.

8. Screw in the ResiTHERM® 16 or 12 with the hexagon bit (included) and a cordless screwdriver until the seal is pressed against the plaster.


Note: The thermal separation module drills itself through the insulation (additional sealing is not necessary, unless the plaster is very rough)

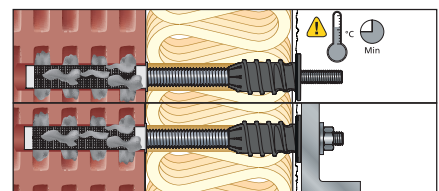

9. Observe curing time of the injection system, see cartridge label of the ResiFIX injection mortar.


10. Afterwards, the attachment can be mounted, max. torque $T_{inst} = 25 \text{ Nm}$ (ResiTHERM® 16) or 19 Nm (ResiTHERM® 12)
(Observe possible deviating max. installation torque in the ETA of the injection system used)

ResiTHERM 16® Sets

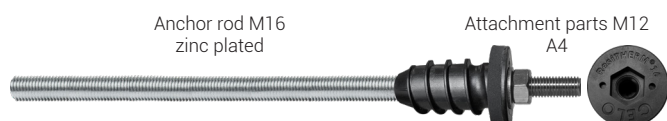

ResiTHERM® 8.8 16/250 M12

Type	Art-No	Content Set [preassembled]	Length L [mm]	Con- nection thread	Thickness of insula- tion e [mm]		€/ set	 [set]	 [sets]
Set ResiTHERM® 8.8 16/250 M12, 2 pieces	9250RTH162	2x ResiTHERM® 16, thermal separation module M16 / M12 2x Threaded rod M16x350, DIN 976, zinc plated, steel quality 8.8 2x Threaded stud M12x70, DIN 913, A4 2x Hexagon nut M12, DIN 934, A4 2x Washer M12, DIN 125, A4 1x Hexagon socket bit, size 6 1x Mixing nozzle extension 245 mm 2x Plastic sleeve SH 20x130 mm 1x Instruction manual ResiTHERM® 16	385	M12	Concrete: 60- 300 Solid brick, Aerated concrete: 60 - 280 Hollow brick: 60 - 250	●		1	8
Set ResiTHERM® 8.8 16/250 M12, 20 pieces	9250RTH1620	20x ResiTHERM® 16, thermal separation module M16 / M12 20x Threaded rod M16x350, DIN 976, zinc plated, steel quality 8.8 20x Threaded stud M12x70, DIN 913, A4 20x Hexagon nut M12, DIN 934, A4 20x Washer M12, DIN 125, A4 1x Hexagon socket bit, size 6 8x Mixing nozzle extension 245 mm 20x Plastic sleeve SH 20x130 mm 4x Instruction manual ResiTHERM® 16	385	M12	Concrete: 60- 300 Solid brick, Aerated concrete: 60 - 280 Hollow brick: 60 - 250	●		1	-

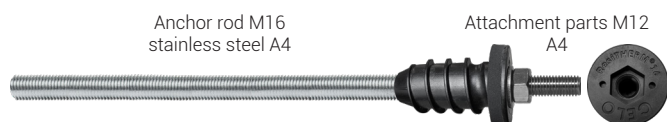

A4
STAINLESS
STEEL

ResiTHERM® A4 16/250 M12

Type	Art-No	Content Set [preassembled]	Length L [mm]	Con- nection thread	Thickness of insula- tion e [mm]		€/ set	 [set]	 [sets]
Set ResiTHERM® A4 16/250 M12, 2 pieces	9X250RTH162	2x ResiTHERM® 16, thermal separation module M16 / M12 2x Threaded rod M16x350, DIN 976, stainless steel A4 2x Threaded stud M12x70, DIN 913, A4 2x Hexagon nut M12, DIN 934, A4 2x Washer M12, DIN 125, A4 1x Hexagon socket bit, size 6 1x Mixing nozzle extension 245 mm 2x Plastic sleeve SH 20x130 mm 1x Instruction manual ResiTHERM® 16	385	M12	Concrete: 60- 300 Solid brick, Aerated concrete: 60 - 280 Hollow brick: 60 - 250	●		1	8
Set ResiTHERM® A4 16/250 M12, 20 pieces	9X250RTH1620	20x ResiTHERM® 16, thermal separation module M16 / M12 20x Threaded rod M16x350, DIN 976, stainless steel A4 20x Threaded stud M12x70, DIN 913, A4 20x Hexagon nut M12, DIN 934 A4 20x Washer M12, DIN 125, A4 1x Hexagon socket bit, size 6 8x Mixing nozzle extension 245 mm 20x Plastic sleeve SH 20x130 mm 4x Instruction manual ResiTHERM® 16	385	M12	Concrete: 60- 300 Solid brick, Aerated concrete: 60 - 280 Hollow brick: 60 - 250	●		1	-

ResiTHERM 12® Sets



ResiTHERM® 8.8 12/160 M12

Type	Art-No	Content Set [preassembled]	Length L [mm]	Con- nection thread	Thickness of insula- tion e [mm]		€/set	 [set]	 [sets]
Set ResiTHERM® 8.8 12/160 M12, 2 pieces	9160RTH122	2x ResiTHERM® 12, thermal separation module M12 / M12 2x Threaded rod M12x260, DIN 976, zinc plated, steel quality 8.8 2x Threaded stud M12x70, DIN 913, A4 2x Hexagon nut M12, DIN 934, A4 2x Washer M12, DIN 125, A4 1x Hexagon socket bit, size 6 1x Mixing nozzle extension 245 mm 2x Plastic sleeve SH 20x130 mm 1x Instruction manual ResiTHERM® 12	295	M12	Concrete: 60 - 220 Solid brick, Aerated concrete: 60 - 190 Hollow brick: 60 - 160	●		1	8
Set ResiTHERM® 8.8 12/160 M12, 20 pieces	9160RTH1220	20x ResiTHERM® 12, thermal separation module M12 / M12 20x Threaded rod M12x260, DIN 976, zinc plated, steel quality 8.8 20x Threaded stud M12x70, DIN 913, A4 20x Hexagon nut M12, DIN 934, A4 20x Washer M12, DIN 125, A4 1x Hexagon socket bit, size 6 8x Mixing nozzle extension 245 mm 20x Plastic sleeve SH 20x130 mm 4x Instruction manual ResiTHERM® 12	295	M12	Concrete: 60 - 220 Solid brick, Aerated concrete: 60 - 190 Hollow brick: 60 - 160	●		1	-



ResiTHERM® A4 12/160 M12

Type	Art-No	Content Set [preassembled]	Length L [mm]	Con- nection thread	Thickness of insula- tion e [mm]		€/set	 [set]	 [sets]
Set ResiTHERM® A4 12/160 M12, 2 pieces	9X160RTH122	2x ResiTHERM® 12, thermal separation module M12 / M12 2x Threaded rod M12x260, DIN 976, stainless steel A4 2x Threaded stud M12x70, DIN 913, A4 2x Hexagon nut M12, DIN 934, A4 2x Washer M12, DIN 125, A4 1x Hexagon socket bit, size 6 1x Mixing nozzle extension 245 mm 2x Plastic sleeve SH 20x130 mm 1x Instruction manual ResiTHERM® 12	295	M12	Concrete: 60 - 220 Solid brick, Aerated concrete: 60 - 190 Hollow brick: 60 - 160	●		1	8
Set ResiTHERM® A4 12/160 M12, 20 pieces	9X160RTH1220	20x ResiTHERM® 12, thermal separation module M12 / M12 20x Threaded rod M12x260, DIN 976, stainless steel A4 20x Threaded stud M12x70, DIN 913, A4 20x Hexagon nut M12, DIN 934 A4 20x Washer M12, DIN 125, A4 1x Hexagon socket bit, size 6 8x Mixing nozzle extension 245 mm 20x Plastic sleeve SH 20x130 mm 4x Instruction manual ResiTHERM® 12	295	M12	Concrete: 60 - 220 Solid brick, Aerated concrete: 60 - 190 Hollow brick: 60 - 160	●		1	-

A4
STAINLESS
STEEL

ResiTHERM® 16 & 12 accessories



Two-hole nut driver DIN 3116C for adjusting ResiTHERM® 16 & 12

Type	Art-No	Length L [mm]	Width B [mm]	Sheet thickness t _m [mm]	Suitable for	€ / pc	[pcs]	[pcs]
Twohole nut driver	155253AMT	155	25	3	ResiTHERM® 16 & 12		1	15



Threaded stud adapter M12/M10, stainless steel A4 incl M10 nut and washer

A4
STAINLESS
STEEL

Type	Art-No	Length L [mm]	Suitable for	€ / pc	[pcs]	[pcs]
Threaded stud adapter	X70M12M10ECT4	70	ResiTHERM® 16 & 12		4	60



VY 300 SF



VY 345 SF



VY 410 SF

Vinylester VYSF (styrene free)

Type	Art-No	Content [ml]	Mixing nozzles included [pcs]	Shelf life [months]		€ / pc	[pcs]
VY 300 SF	300VSF	280	2	18	●		12
VY 345 SF	345VSF	345	2	18	●		12
VY 410 SF	410VYSF	410	1	18	●		12



Vinylester VY ECO SF (styrene free)

Type	Art-No	Content [ml]	Mixing nozzles included [pcs]	Shelf life [months]		€ / pc	[pcs]
VY ECO 300 SF	300VYECOSF	300	2	18	●		12



PY 165 SF



PY 300 SF



PY 345 SF



PY 410 SF

Polyester PYSF (styrene free)


Type	Art-No	Content [ml]	Mixing nozzles included [pcs]	Shelf life [months]		€ / pc	[pcs]
PY 165 SF	165PSF	165	2	18	●		1/12
PY 300 SF	300PSF	300	1	18	●		12
PY 345 SF	345PSF	345	1	18	●		12
PY 410 SF	410PYSF	410	1	18	●		12



Cleaning brush RBS



Extension for RBS



Handle for RBS



Cleaning brush RBK



Blow out pump AB

Type	Art-No	Length [mm]	Suitable for drill hole Ø [mm]	Suitable for anchor rod	Connecting thread	€ / pc	[pcs]
RBS Ø20 for concrete and masonry	9M20RBK	200	18	M16	M6		5
Extension for RBS Ø20	MRBKV	–	all	all	M6		5
Handle for RBS Ø20	MRBKH	140	all	all	M6		5
RBK Ø20 for masonry*	9PLRBK	300	20	M16	–		5
Blow out pump AB	BOP	300	8	–	–		1

*) not part of the ETA assessments of the ResiFIX injection mortars



Mixing nozzle MD



Mixing nozzle extension MDV

Type	Art-No	Outer-Ø [mm]	Length [mm]	€ / pc	[pcs]
MD	9MRMEA	–	215		10
MDV 10	9MDV	10	200		10
MDV 10	9500MDV	10	500		10



APP300






APVM



APP380

Type	Art-No	suitable for ResiFIX type	€ / pc	[pcs]
APP 300	300APP	300 / 165 / 280		1
APVM	345APVM	345 / 300 / 280 / 165		1
APP 380	380APP	410		1

ResiTHERM® 16 & 12 technical data

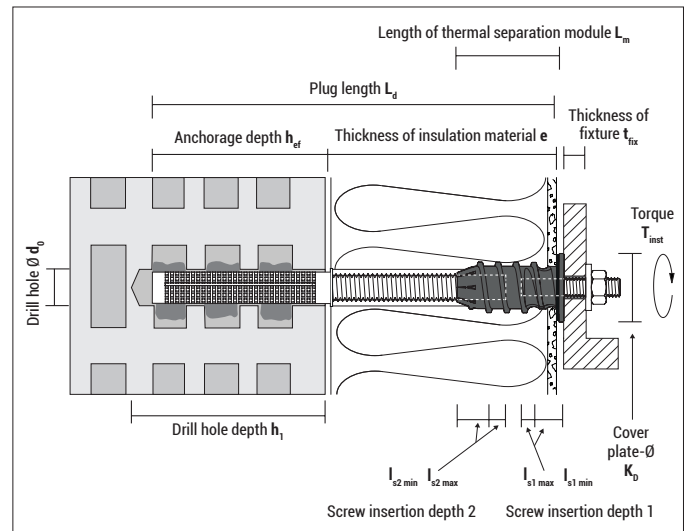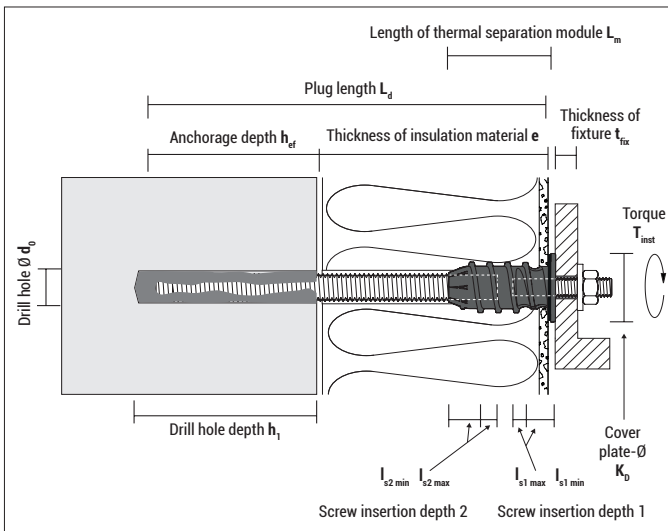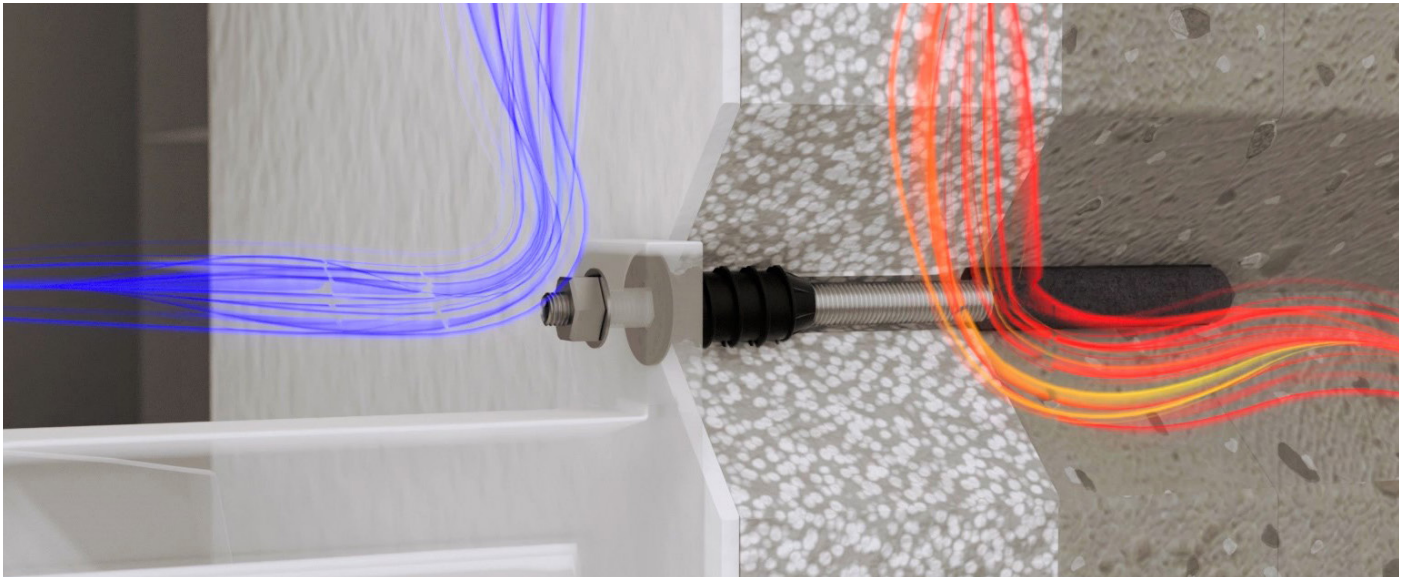

Installation parameters			Installation in concrete		Installation in aerated concrete/solid brick		Installation in perforated brick	
			ResiTHERM® 16	ResiTHERM® 12	ResiTHERM® 16	ResiTHERM® 12	ResiTHERM® 16	ResiTHERM® 12
Plug length	L_d	[mm]	385 ¹⁾	295 ¹⁾	385 ¹⁾	295 ¹⁾	385 ¹⁾	295 ¹⁾
Thickness of insulation material (incl. plaster)	e	[mm]	60 - max. 300	60 - max. 220	60 - max. 280	60 - max. 190	60 - max. 250	60 - max. 160
Length of thermal separation module (to lower edge of cover plate)	L_m	[mm]	60	60	60	60	60	60
Diameter cover plate	K_D	[mm]	42	42	42	42	42	42
Threaded rod		[mm]	M16 x 350 ¹⁾	M12 x 260 ¹⁾	M16 x 350 ¹⁾	M12 x 260 ¹⁾	M16 x 350 ¹⁾	M12 x 260 ¹⁾
Insertion depth of threaded stud	$l_{s2 \text{ min-max}}$	[mm]	24-27	24-27	24-27	24-27	24-27	24-27
Drill hole diameter	d_0	[mm]	18	14	18	14	20	20
Drill hole depth	$h_1 \geq$	[mm]	90 + e	80 + e	110 + e	110 + e	140 + e	140 + e
Anchorage depth	h_{ef}	[mm]	80	70	100	100	125	125
Plastic sleeve SH			—	—	—	—	20-130	20-130
Connecting thread		[mm]	M12 ³⁾	M12 ³⁾	M12 ³⁾	M12 ³⁾	M12 ³⁾	M12 ³⁾
Insertion depth of M12 threaded stud	$l_{s1 \text{ min-max}}$	[mm]	30-34	30-34	30-34	30-34	30-34	30-34
Thickness of fixture	$t_{fix} \leq$	[mm]	24 ²⁾	24 ²⁾	24 ²⁾	24 ²⁾	24 ²⁾	24 ²⁾

¹⁾ Threaded rod has to be cut as needed.

For further technical values, see assessment of the ResiFIX injection system used.

²⁾ When using the threaded stud with length $L=70$ mm. Otherwise, a longer threaded stud or a longer metric screw can be used.

³⁾ Alternative: Threaded stud adapter M12/M10, length 70 mm, stainless steel A4, Art-No X70M12M10ECT4

Permissible tension load and pressure load ResiTHERM® 16¹⁾ at 24°C/40°C²⁾

M16 anchor rod in 8.8	applied injection mortar ResiFIX VY SF acc. ETA-10/0134	applied injection mortar ResiFIX VY SF acc. ETA-15/0320				
Base material						
	Concrete C20/25 ³⁾	Solid sand-lime brick KS KS28-2,0 ³⁾	Solid brick MZ 20-2,0 ¹⁾	Hollow sand-lime brick KSL 12-1,4 ⁴⁾	Hollow brick HLZ 12-1,25 ⁴⁾	Aerated concrete AAC 2 ³⁾
Insulation thickness e	Permissible tension load N _{per}					
	[kN]	[kN]	[kN]	[kN]	[kN]	[kN]
60-300 mm	4,57	2,00	2,29	1,65	1,11	0,71
Insulation thickness e	Permissible pressure load P _{per}					
	[kN]	[kN]	[kN]	[kN]	[kN]	[kN]
60 - 220 mm	5,14	2,00	2,29	1,65	1,11	0,71
221 - 300 mm	5,14	2,00	2,29	1,65	1,11	0,71
Min. anchorage depth h _{ef}	80	100	100	130	130	100

¹⁾ Loads include the partial safety factors of the material given in the ETA as well as a partial safety factor for the actions of $\gamma_F = 1.4$.

²⁾ For other temperature ranges see ETA-assessment.

³⁾ In full material the tension load resistance can be used also for the pressure load resistance.

⁴⁾ In hollow materials the pressure load resistance specified in the ETA can be applied, if the setting depth is deep enough to include minimum 5 webs with the injection mortar. If the setting depth is lower and does not include 5 webs, then the pressure load resistance must be reduced.

Permissible tension load and pressure load ResiTHERM® 12¹⁾ at 24°C/40°C²⁾


M12 anchor rod in 8.8	applied injection mortar ResiFIX VY SF acc. ETA-10/0134	applied injection mortar ResiFIX VY SF acc. ETA-15/0320				
Base material						
	Concrete C20/25 ³⁾	Solid sand-lime brick KS KS28-2,0 ³⁾	Solid brick MZ 20-2,0 ¹⁾	Hollow sand-lime brick KSL 12-1,4 ⁴⁾	Hollow brick HLZ 12-1,25 ⁴⁾	Aerated concrete AAC 2 ³⁾
Insulation thickness e	Permissible tension load N _{per}					
	[kN]	[kN]	[kN]	[kN]	[kN]	[kN]
60 - 220 mm	5,14	2,00	2,00	1,65	1,11	0,71
Insulation thickness e	Permissible pressure load P _{per}					
	[kN]	[kN]	[kN]	[kN]	[kN]	[kN]
60 - 120 mm	5,14	2,00	2,00	1,65	1,11	0,71
121 - 160 mm	5,14	2,00	2,00	1,65	1,11	0,71
161 - 220 mm	2,86	2,00	2,00	1,65	1,11	0,71
Min. anchorage depth h _{ef}	70	100	100	130	130	100

¹⁾ Loads include the partial safety factors of the material given in the ETA as well as a partial safety factor for the actions of $\gamma_F = 1.4$.

²⁾ For other temperature ranges see ETA-assessment.

³⁾ In full material the tension load resistance can be used also for the pressure load resistance.

⁴⁾ In hollow materials the pressure load resistance specified in the ETA can be applied, if the setting depth is deep enough to include minimum 5 webs with the injection mortar. If the setting depth is lower and does not include 5 webs, then the pressure load resistance must be reduced.



Maximum shear loads $V^{1)}$ of a single plug at max. 3 or 5 mm displacement per ResiTHERM® if the free outer end of the ResiTHERM® 16 & 12 is not freely rotatable [e.g. connected double fixing] $^{2)}$ at 24°C/40°C $^{3)}$

Not free rotatable anchor rod M16 in 8.8	applied injection mortar ResiFIX VY SF acc. ETA-10/0134	applied injection mortar ResiFIX VY SF acc. ETA-15/0320					
Base material							
	Concrete C20/25	Solid sand-lime brick KS KS28-2,0	Solid brick MZ 20-2,0	Hollow sand-lime brick KSL 12-1,4	Hollow brick HLZ 12-1,25	Aerated concrete AAC 2	

if displacement is 3 mm

Insulation thickness e [mm]	Maximum shear load V [kN]											
	ResiTHERM® 16		ResiTHERM® 12		ResiTHERM® 16		ResiTHERM® 12		ResiTHERM® 16		ResiTHERM® 12	
	16	12	16	12	16	12	16	12	16	12	16	12
60	2,14	1,43	2,00	1,43	2,14	1,43	1,53	1,43	2,14	1,43	0,89	0,89
80	2,14	1,43	2,00	1,43	2,14	1,43	1,53	1,43	2,14	1,43	0,89	0,89
100	2,14	1,43	2,00	1,43	2,14	1,43	1,53	1,43	2,14	1,43	0,89	0,89
120	1,84	1,01	1,84	1,01	1,84	1,01	1,53	1,01	1,84	1,01	0,89	0,89
140	1,49	0,85	1,49	0,85	1,49	0,85	1,49	0,85	1,49	0,85	0,89	0,85
160	1,15	0,69	1,15	0,69	1,15	0,69	1,15	0,69	1,15	0,69	0,89	0,69
180	0,80	0,54	0,80	0,54	0,80	0,54	0,80	0,54	0,80	0,54	0,80	0,54
200	0,71	0,38	0,71	0,38	0,71	0,38	0,71	0,38	0,71	0,38	0,71	0,38
220	0,61	0,22	0,61	0,22	0,61	0,22	0,61	0,22	0,61	0,22	0,61	0,22
240	0,51	–	0,51	–	0,51	–	0,51	–	0,51	–	0,51	–
250	0,47	–	0,47	–	0,47	–	0,47	–	0,47	–	0,47	–
260	0,42	–	0,42	–	0,42	–	0,42	–	0,42	–	0,42	–
280	0,32	–	0,32	–	0,32	–	0,32	–	0,32	–	0,32	–
300	0,22	–	0,22	–	0,22	–	0,22	–	0,22	–	0,22	–

if displacement is 5 mm

Insulation thickness e [mm]	Maximum shear load V [kN]											
	ResiTHERM® 16		ResiTHERM® 12		ResiTHERM® 16		ResiTHERM® 12		ResiTHERM® 16		ResiTHERM® 12	
	16	12	16	12	16	12	16	12	16	12	16	12
60	2,14	1,43	2,00	1,43	2,14	1,43	1,53	1,43	2,14	1,43	0,89	0,89
80	2,14	1,43	2,00	1,43	2,14	1,43	1,53	1,43	2,14	1,43	0,89	0,89
100	2,14	1,43	2,00	1,43	2,14	1,43	1,53	1,43	2,14	1,43	0,89	0,89
120	2,14	1,43	2,00	1,43	2,14	1,43	1,53	1,43	2,14	1,43	0,89	0,89
140	2,14	1,29	2,00	1,29	2,14	1,29	1,53	1,29	2,14	1,29	0,89	0,89
160	1,76	1,06	1,76	1,06	1,76	1,06	1,53	1,06	1,76	1,06	0,89	0,89
180	1,27	0,82	1,27	0,82	1,27	0,82	1,27	0,82	1,27	0,82	0,89	0,82
200	1,12	0,59	1,12	0,59	1,12	0,59	1,12	0,59	1,12	0,59	0,89	0,59
220	0,97	0,35	0,97	0,35	0,97	0,35	0,97	0,35	0,97	0,35	0,89	0,35
240	0,82	–	0,82	–	0,82	–	0,82	–	0,82	–	0,82	–
250	0,74	–	0,74	–	0,74	–	0,74	–	0,74	–	0,74	–
260	0,67	–	0,67	–	0,67	–	0,67	–	0,67	–	0,67	–
280	0,51	–	0,51	–	0,51	–	0,51	–	0,51	–	0,51	–
300	0,36	–	0,36	–	0,36	–	0,36	–	0,36	–	0,36	–

Thickness of structural part	h_{min} [mm]	112	115	115	195	195	240
Min. edge distance	c_{min} [mm]	80	60	60	60	50	50
Min. spacing	s_{min} [mm]	80	75	65	120	50	50
Torque	T_{inst} [Nm]	25 ⁴⁾	19 ⁴⁾	15 ⁴⁾	10 ⁴⁾	8 ⁴⁾	10 ⁴⁾


All values are based on injection mortar ResiFIX VY SF, see page 181

¹⁾ Intermediate values can be interpolated/ Values are limited due to the maximum shear load capacity.

²⁾ e.g. for awning brackets or supported canopies

³⁾ For other temperature ranges see ETA-assessment.

⁴⁾ Depending on the base material, see ETA of ResiFIX injection mortar



Maximum shear loads $V^{1)}$ of a single plug at max. 3 or 5 mm displacement per ResiTHERM® if the free outer end of the ResiTHERM® 16 & 12 is freely rotatable $2)$ at 24°C/40°C $3)$

Free rotatable anchor rod M16 in 8.8	applied injection mortar ResiFIX VY SF acc. ETA-10/0134	applied injection mortar ResiFIX VY SF acc. ETA-15/0320					
Base material							
	Concrete C20/25	Solid sand-lime brick KS KS28-2,0	Solid brick MZ 20-2,0	Hollow sand-lime brick KSL 12-1,4	Hollow brick HLZ 12-1,25	Aerated concrete AAC 2	

if displacement is 3 mm

Insulation thickness e [mm]	Maximum shear load V [kN]											
	ResiTHERM® 16		ResiTHERM® 12		ResiTHERM® 16		ResiTHERM® 12		ResiTHERM® 16		ResiTHERM® 12	
60	1,59	1,25	1,59	1,25	1,59	1,25	1,53	1,25	1,59	1,25	0,89	0,89
80	1,38	0,85	1,38	0,85	1,38	0,85	1,38	0,85	1,38	0,85	0,89	0,85
100	1,06	0,61	1,06	0,61	1,06	0,61	1,06	0,61	1,06	0,61	0,89	0,61
120	0,75	0,36	0,75	0,36	0,75	0,36	0,75	0,36	0,75	0,36	0,75	0,36
140	0,63	0,31	0,63	0,31	0,63	0,31	0,63	0,31	0,63	0,31	0,63	0,31
160	0,52	0,25	0,52	0,25	0,52	0,25	0,52	0,25	0,52	0,25	0,52	0,25
180	0,41	0,20	0,41	0,20	0,41	0,20	0,41	0,20	0,41	0,20	0,41	0,20
200	0,36	0,14	0,36	0,14	0,36	0,14	0,36	0,14	0,36	0,14	0,36	0,14
220	0,31	0,09	0,31	0,09	0,31	0,09	0,31	0,09	0,31	0,09	0,31	0,09
240	0,26	–	0,26	–	0,26	–	0,26	–	0,26	–	0,26	–
250	0,24	–	0,24	–	0,24	–	0,24	–	0,24	–	0,24	–
260	0,21	–	0,21	–	0,21	–	0,21	–	0,21	–	0,21	–
280	0,17	–	0,17	–	0,17	–	0,17	–	0,17	–	0,17	–
300	0,12	–	0,12	–	0,12	–	0,12	–	0,12	–	0,12	–

if displacement is 5 mm

Insulation thickness e [mm]	Maximum shear load V [kN]											
	ResiTHERM® 16		ResiTHERM® 12		ResiTHERM® 16		ResiTHERM® 12		ResiTHERM® 16		ResiTHERM® 12	
60	1,86	1,43	1,86	1,43	1,86	1,43	1,53	1,43	1,86	1,43	0,89	0,89
80	1,86	1,35	1,86	1,35	1,86	1,35	1,53	1,35	1,86	1,35	0,89	0,89
100	1,66	0,96	1,66	0,96	1,66	0,96	1,53	0,96	1,66	0,96	0,89	0,89
120	1,19	0,56	1,19	0,56	1,19	0,56	1,19	0,56	1,19	0,56	0,89	0,56
140	1,00	0,48	1,00	0,48	1,00	0,48	1,00	0,48	1,00	0,48	0,89	0,48
160	0,82	0,40	0,82	0,40	0,82	0,40	0,82	0,40	0,82	0,40	0,82	0,40
180	0,64	0,31	0,64	0,31	0,64	0,31	0,64	0,31	0,64	0,31	0,64	0,31
200	0,56	0,23	0,56	0,23	0,56	0,23	0,56	0,23	0,56	0,23	0,56	0,23
220	0,49	0,15	0,49	0,15	0,49	0,15	0,49	0,15	0,49	0,15	0,49	0,15
240	0,42	–	0,42	–	0,42	–	0,42	–	0,42	–	0,42	–
250	0,38	–	0,38	–	0,38	–	0,38	–	0,38	–	0,38	–
260	0,34	–	0,34	–	0,34	–	0,34	–	0,34	–	0,34	–
280	0,27	–	0,27	–	0,27	–	0,27	–	0,27	–	0,27	–
300	0,19	–	0,19	–	0,19	–	0,19	–	0,19	–	0,19	–

Thickness of structural part	h_{min} [mm]	112	115	115	195	195	240
Min. edge distance	c_{min} [mm]	80	60	60	60	50	50
Min. spacing	s_{min} [mm]	80	75	65	120	50	50
Torque	T_{inst} [Nm]	25 ⁴⁾	19 ⁴⁾	15 ⁴⁾	10 ⁴⁾	8 ⁴⁾	10 ⁴⁾

All values are based on injection mortar ResiFIX VY SF, see page 181

¹⁾ Intermediate values can be interpolated/ Values are limited due to the maximum shear load capacity.

²⁾ e.g. several ResiTHERM® in a row with a freely cantilevered glass canopy

³⁾ For other temperature ranges see ETA-assessment.

⁴⁾ Depending on the base material, see ETA of ResiFIX injection mortar