




Features

- Welded nut with a guaranteed strength of 6 kg·m.
- EPDM rubber that prevents electrical contact and corrosion of the pipe, and dampens vibrations caused by water (18 dB).
- Resistant to UV rays and seawater.
- EPDM rubber resistant to temperatures from -50 °C to +110 °C.
- Longer pan-headed screw.
- PVC washers are provided to prevent the screws from falling out when opening the clamp.

Certificates and approvals



Main dimensions

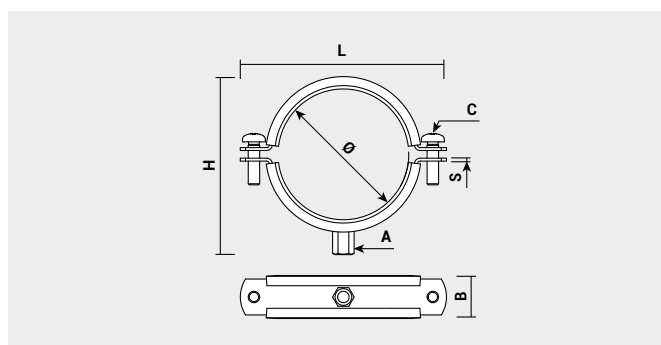

Material

- Zinc-plated clamp and metric screw (according to DIN 13) to a minimum of 5 microns.
- EPDM rubber, SHORE 50, fire rating B2 according to DIN 4102, sound insonorization according to DIN 4109.

VIEL

Reference	Ø [mm]	BxS [mm]	L [mm]	H [mm]	A [mm]	C [mm]
9100VIEL	100	20x1.5	148	99.5	SW13-M8x7	M6x18
9125VIEL	125	20x1.5	179	125.5	SW13-M8x7	M6x18
9160VIEL	160	20x1.5	215	160.5	SW13-M8x7	M6x18
9200VIEL	200	20x1.5	261	198.5	SW13-M8x7	M6x18
9250VIEL	250	25x2	305	258.5	SW13-M8x7	M6x25
9300VIEL	300	25x2	357	303.5	SW13-M8x7	M6x25
9315VIEL	315	25x2	372	318.5 / 330.0	SW13-M8x7	M6x25
9355VIEL	355	25x2	412	358.5 / 370.0	SW13-M8x7	M6x25
9400VIEL	400	25x2	457	403.5 / 415.0	SW13-M8x7	M6x25

VIE

Reference	Ø [mm]	BxS [mm]	L [mm]	H [mm]	A [mm]	C [mm]
9315VIE	315	25x2.0	372	318.5 / 330.	SW13-M8/M10x17	M6x25
9355VIE	355	25x20	412	358.5 / 370.0	SW13-M8/M10x17	M6x25
9400VIE	400	25x20	457	403.5 / 415.0	SW13-M8/M10x17	M6x25
9450VIE	450	25x25	520	465	SW13-M8/M10x17	M6x25
9500VIE	500	25x25	565	515	SW13-M8/M10x17	M6x30
9560VIE	560	25x25	625	575	SW13-M8/M10x17	M6x30
9630VIE	630	25x25	696	645	SW13-M8/M10x17	M6x30
9710VIE	710	25x25	776	725	SW13-M8/M10x17	M6x30
9800VIE	800	25x25	866	815	SW13-M8/M10x17	M6x30

Recommended loads

Under ceiling	
Range	Load [kg]
VIEL 100 - VIE 450	80
VIE 500 - VIE 800	100
On wall	
Metric	Load [kg]
M8	20
M10	50