




Features

- Allows the clamping of a minimum of two main pipes and other intermediate pipes.
- Quick installation.
- Features self-centering rings.
- Available in single and double versions.
- Grey color RAL 7035.
- Installation temperature -5 °C / 45 °C. Continuous use temperature -10 °C / 90 °C. Peak temperatures -25 °C / 110 °C.

Certificates and approvals



Main dimensions

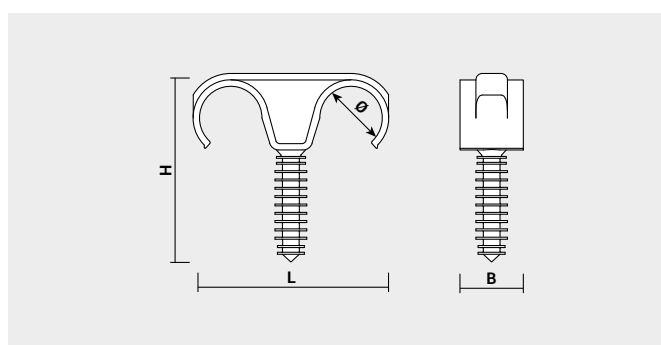


Reference	Ø [mm]	H [mm]	L [mm]	B [mm]
918FTD	16-18	55	51	20
922FTD	20-22	59	62	20
928FTD	25-28	64	73	20

Base material

- Concrete
- Concrete block
- Hollow brick
- Solid brick

Installation procedure

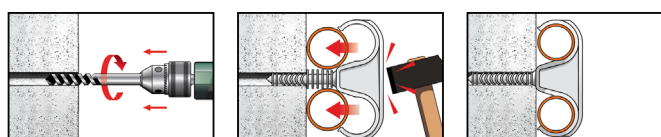

Installation parameters

Drill hole: 8 mm.
Hole depth: 45 mm.

Recommended loads

20 kg in concrete and 10 kg in hollow concrete block.

Pipe range

Ø [mm]	Ø Pipe		
	Iron	Copper [mm]	Plastic [mm]
624	3/8"	18	16
520	1/2"	22	20
446	3/4"	28	25